


# Sulphur

**Towards High Quality Products & Services**

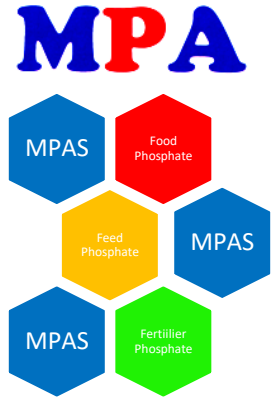

## SPECIFICATION OF SULPHUR

Properties		Specification
Sulphur content	min	76.0 %

*\* Typical analysis does not constitute a specification*

### Packing

TBA

### Storage

- ✚ Store in dry cool areas away from rain, moisture and sunlight in properly sealed packaging.
- ✚ Store far from detrimental / poisonous matter to avoid any cross contamination.

### Application

- ✚ Can be further refined into coking benzene, toluene, xylene, or light solvent oil.
- ✚ Used in chemical manufacturing

Contact Us : [mpa.sales@malaysianphosphate.com](mailto:mpa.sales@malaysianphosphate.com)

The information contained herein is a representation of the average properties of product tested on composite samples and should not be considered a guaranteed specification. Depending on the shipment and sample analyses it may fall outside of the above typical values. In addition, multiple handling, transportation, or improper/extended storage may also affect the tested analysis. User are advised to do your own testing when using and we shall not be responsible for any liability, loss or damage that may occur from any reliance for use based upon the above information. © Copyright 2016. Version 2016/1

**MALAYSIAN PHOSPHATE ADDITIVES (Sarawak) SDN BHD**  
609, Block F, Phileo Damansara 1, No. 9, Jln 16/11, Off Jln Damansara,  
46350 Petaling Jaya, Selangor, MALAYSIA

Website: [www.malaysianphosphate.com](http://www.malaysianphosphate.com)

Phone: 03 – 7958 7329 Fax: 03 – 7958 6329